








Rohs

| REV. | DESCRIPTION | DRAW. | DATE. |
|------|-------------|-------|-------|
|      |             |       |       |
|      |             |       |       |



| PART NO.          | DIM A | DIM B       |
|-------------------|-------|-------------|
| AUGO-BC-17-3PD430 | 2.4   | 4.30 ± 0.25 |
| AUGO-BC-17-3PD540 | 3.5   | 5.40 ± 0.25 |

Material:  
 Insulator : LCP(UL94V-0)  
 Contact : Phosphor Bronze  
 Contact Plated : Gold over Nickel or Tin  
 Specification:  
 Current Rating : 3A  
 Voltage Rating : 24V  
 Contact Resistance : 30m Ω  
 Insulation Resistance : 500M Ω  
 Dielectric Voltage : 500V  
 Operating Temperature : -40°~85°  
 Electrical Life : 5000cycles

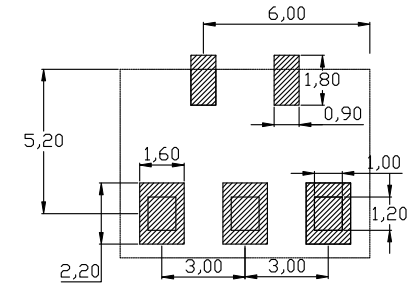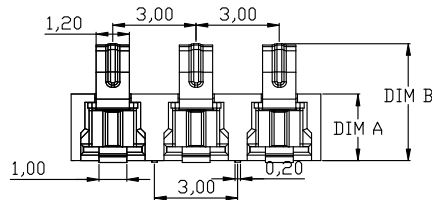

RECOMMENDED PCB LAYOUT  
 TOP VIEW (. XX ± 0.05)

**AUGO**

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

|            |          |  |        |                             |                |          |         |           |
|------------|----------|--|--------|-----------------------------|----------------|----------|---------|-----------|
| REV:       | 01       | UNLESS OTHERWISE SPECIFIED, TOLERANCE: | TITLE: | 3.0 PITCH BATTERY CONNECTOR | DESIGN         | G.C.CHEN | DATE    |           |
| SIZE:      | A4       |  |        |                             | X.             | ±0.20    | DRAWING | Y.C.ZHANG |
| SCALE: 1:1 | UNIT: mm | X.x                                    | ±0.15  | PART NO:                    | CHECK          | D.J.WANG | DATE    |           |
| SHEET: 1/1 |          | X.xx                                   | ±0.10  |                             | AUGO-BC-17-3PD | SCALE    | 1:1     | PAGE      |
|            |          | ANGULAR                                | ±2°    |                             |                |          |         |           |