
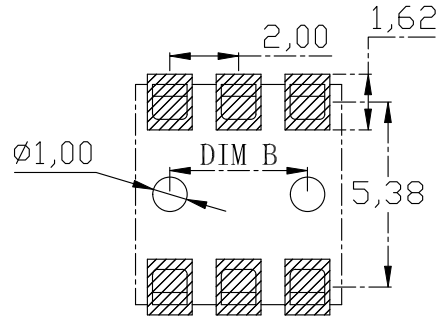






Rohs

REV.	DESCRIPTION	DRAW.	DATE.



PART NO.	DIM A	DIM B
AUGO-BF-20-2PD127	4.0	2.0
AUGO-BF-20-3PD127	6.0	4.0
AUGO-BF-20-4PD127	8.0	6.0
AUGO-BF-20-5PD127	10.0	8.0
AUGO-BF-20-6PD127	12.0	10.0
AUGO-BF-20-7PD127	14.0	12.0
AUGO-BF-20-8PD127	16.0	14.0

RECOMMENDED PCB LAYOUT  
TOP VIEW (. XX±0.05)

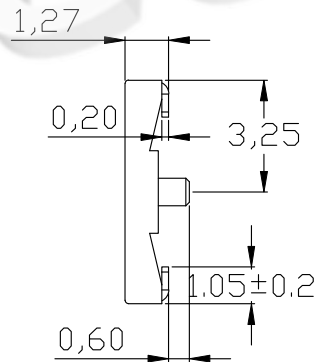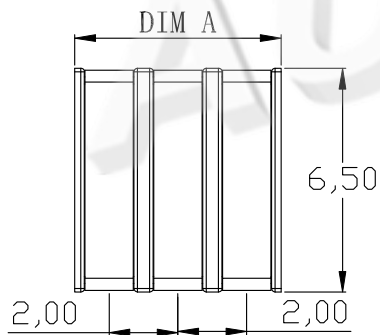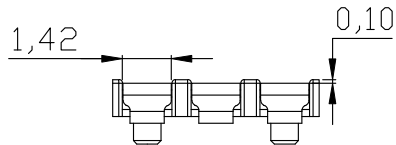

Material:  
 Insulator : PA9T(UL94V-0)  
 Contact : Phosphor Bronze  
 Contact Plated : Gold over Nickel or Tin  
 Specification:  
 Current Rating : 5A  
 Voltage Rating : 30V  
 Contact Resistance : 30m Ω  
 Insulation Resistance : 500M Ω  
 Dielectric Voltage : 500V  
 Operating Temperature : -40°~125°  
 Electrical Life : 10000cycles

**AUGO**

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED, TOLERANCE:	TITLE:	2.0 PITCH BATTERY CONNECTOR	DESIGN	G.C.CHEN	DATE		
SIZE:	A4				X.	±0.20	DRAWING	Y.C.ZHANG	DATE
SCALE: 1:1	UNIT: mm	X.x	±0.15	PART NO:	AUGO-BF-20H127	CHECK	D.J.WANG	DATE	
SHEET: 1/1		X.xx	±0.10			SCALE	1:1	PAGE	1 OF 1
		ANGULAR	±2°						