

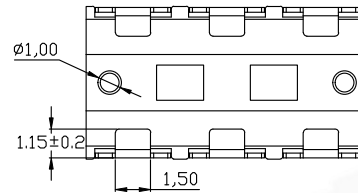




Rohs


REV.	DESCRIPTION	DRAW.	DATE.

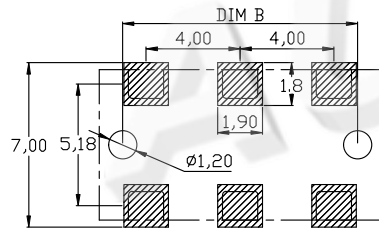

PART NO.	DIM A	DIM B
AUGO-BF-40-2PD190	8.0	6.0
AUGO-BF-40-3PD190	12.0	10.0
AUGO-BF-40-4PD190	16.0	14.0
AUGO-BF-40-5PD190	20.0	18.0
AUGO-BF-40-6PD190	24.0	22.0

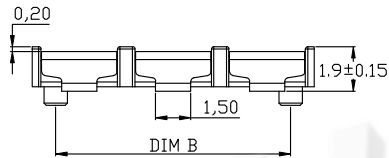

RECOMMENDED PCB LAYOUT  
TOP VIEW (.XX±0.05)

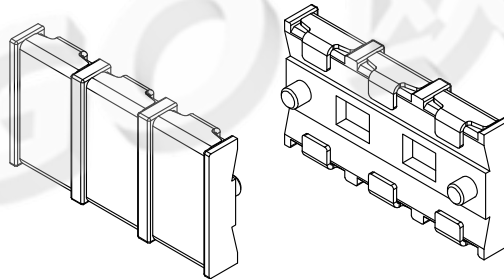

Material:  
 Insulator : LCP(UL94V-0)  
 Contact : Phosphor Bronze  
 Contact Plated : Gold over Nickel or Tin  
 Specification:  
 Current Rating : 5A  
 Voltage Rating : 30V  
 Contact Resistance : 50m Ω  
 Insulation Resistance : 500M Ω  
 Dielectric Voltage : 500V  
 Operating Temperature : -40°~125°  
 Electrical Life : 10000cycles

**AUGO**

AUGO ELECTRONICS CO.,LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

REV:	01	UNLESS OTHERWISE SPECIFIED,TOLERANCE:		TITLE:	4.0 PITCH BATTERY CONNECTOR <th>DESIGN</th> <td>G.C.CHEN</td> <th>DATE</th> <td></td>	DESIGN	G.C.CHEN	DATE	
SIZE:	A4	X.	±0.20	PART NO:	AUGO-BF-40H190	DRAWING	Y.C.ZHANG	DATE	
SCALE: 1:1	UNIT: mm	X.x	±0.15			CHECK	D.J.WANG	DATE	
SHEET: 1/1	⊕	X.xx	±0.10			SCALE	1:1	PAGE	1 OF 1
	∠	ANGULAR	±2°						